



## P958

A majolica cladded stove with classic lines with hints of modern looks which may adapt to various decors. Ideal for heating medium sized rooms.

### COLOURS ▾



#### GENERAL TECHNICAL CHARACTERISTICS

**Multifuel System®**  
Three speed forced ventilation system.  
Warm air ducting up to 16 m

**Multifunction remote control**  
LCD display, timer, thermostat and Multicomfort function

**Programming**  
Daily, weekly and weekend modes.  
Dual time settings

**Remote Control System**  
Optional kit for remote control of stove with a simple SMS

**Structure**  
Enamelled steel with door, brazier and firebox in cast iron

**Majolica cladding**  
Unique large hand-made pieces

**Rolling Top**  
Upper cover plate on sliding tracks to access hopper


**Air Glass System**  
Self-cleaning ceramic glass resistant up to 750°C

**Energy Saving**  
Quick and easy maintenance, removable ash drawer

**Wellness**  
Humidifier with aroma diffuser

**Eco function**  
Automatic power control of the fire

#### TECHNICAL DRAWING

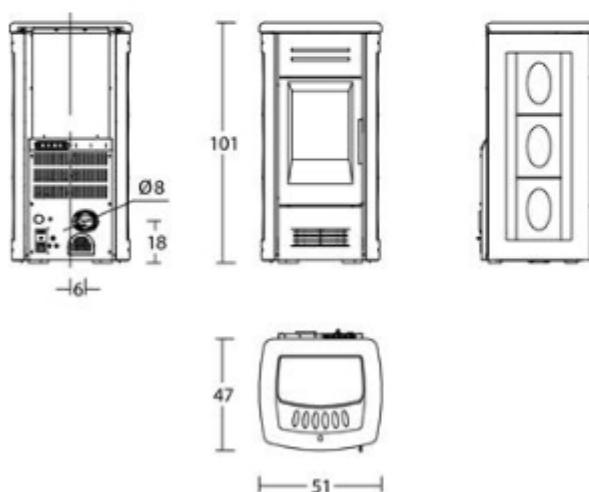

#### TECHNICAL DATA

|  |                |   |
|--|----------------|---|
| Room heating capacity (min-max)            | m <sup>2</sup> | 145 - 250                                 |
| Rated heat output (min-max)                | kW             | 2,7 - 8,6                                 |
| Power adjustable (positions)               |                | 4   |
| Nominal thermal efficiency                 | %              | 89,3                                      |
| Consumption at rated heat output (min-max) | Kg/h           | 0,6 - 1,9                                 |
| Dimensions WxDxH                           | cm             | 51 x 49 x 101                             |
| Cladding/Door                              |                | majolica                                  |
| Top  |                | rolling top                               |
| Firebox                                    |                | steel                                     |
| Baffle plate/Firebox/Brazier               |                | cast iron                                 |
| Flue outlet Ø                              | cm             | Ø8  |
| Flue direction options                     |                |   |
| Ash drawer                                 |                | removable                                 |
| Door                                       |                | cast iron                                 |
| Ceramic glass                              |                | resistant up to 750°C                     |
| Door handle                                |                | steel with nickel plated finish           |
| Hopper capacity                            | Kg             | 16  |
| Humidifier in stainless steel              |                | yes                                       |
| Oven in stainless steel (LxWxH)            | cm             |   |
| Multifuel System®                          |                | 3 levels speed                            |
| Dual Power                                 |                | no  |
| Remote control                             |                | display LCD                               |
| Stove control panel                        |                | with digital control                      |
| Timer/thermostat with programming          |                | daily, weekly and week-end with two times |
| Remote Control System                      |                | optional                                  |
| Front air vents orientable                 |                | yes - yes                                 |
| Lateral vents                              |                |   |
| Minimum power consumption                  | Watt           | 100                                       |
| Maximum power consumption                  | Watt           | 390                                       |
| Total weight                               | Kg             | 148                                       |

Calculated based on nominal heat output and refers to rooms with a thermal requirement between 0.060 and 0.035 kW per m<sup>2</sup>.

The availability of models may vary from Country to Country.

Poichè l'azienda è costantemente impegnata nel continuo perfezionamento di tutta la sua produzione, le caratteristiche estetiche e dimensionali, i dati tecnici e gli accessori possono essere soggetti a variazione.

Numero Verde  
**800-842026**  
[www.piazzetta.it](http://www.piazzetta.it)

 **PIAZZETTA**  
PASSIONE ACCESA